

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 913 131 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.05.1999 Bulletin 1999/18

(51) Int Cl.<sup>6</sup>: A61F 2/08

(21) Application number: 98308334.6

(22) Date of filing: 14.10.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Frazier, John K.  
Lafayette, California 94549 (US)

(74) Representative: Pluckrose, Anthony William et al  
BOULT WADE TENNANT,  
27 Furnival Street  
London EC4A 1PQ (GB)

(30) Priority: 14.10.1997 US 949368

(71) Applicant: Frazier, John K.  
Lafayette, California 94549 (US)

### (54) Intra-articular tendon sling fixation screw

(57) The present invention, with reference to Figure 3, teaches a fixation screw for securing a graft (1) to a bone (2). The fixation screw is formed with a body member (3) having a distal end (4), a proximal end (5), a central axis (6) and a cannula (7) through the central axis (6) of the body member (3). The body member (3) also

has a shank portion (9) which is formed with an external screw thread (10), and a head portion (11) rigidly coupled to the shank portion (9). The head portion (11) is formed to mechanically couple with a driver and also to directly receive the graft (1) which the fixation screw anchors.

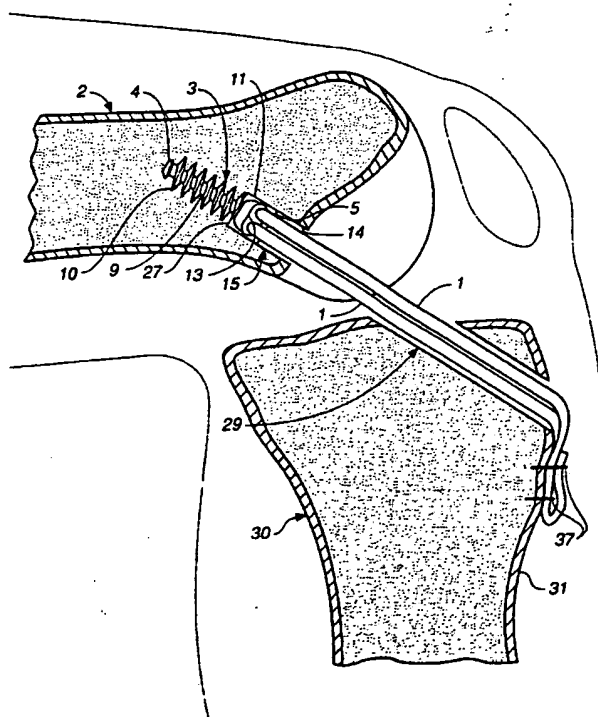


FIG. 3

EP 0 913 131 A2

## Description

### Background of the Invention

[0001] This invention relates to an anchoring device for use in reconstructing torn ligament connections, such as the anterior cruciate ligament (ACL) in the knee. Specifically, this invention relates to an improved fixation screw, called an intra-articular tendon sling fixation screw by the inventor, which is formed as a unitary construct. The fixation screw has a threaded shank portion that can be inserted into bone and a head portion formed with an eyelet through which a graft, such as an autograft, an allograft or a prosthetic ligament, can be looped.

[0002] The fixation screw of the present invention is particularly suited for reconstructive surgery in which the fixation screw is preferably inserted completely into bone and directly receives the graft. As such, the present invention is particularly suited for ACL reconstruction and for posterior cruciate ligament (PCL) reconstruction in the knee. It is to be noted that ACL reconstruction has become a common operation. On the other hand, PCL reconstruction surgery is performed much less often as significant knee function can be maintained without the benefit of the PCL. Thus, for illustrative purposes, this specification will focus on ACL reconstruction surgery to illustrate the use, function and benefits of the present invention.

[0003] Reconstructive surgeries of the ACL date back as far as 1904. Since that time, a variety of different methods and devices for aiding in the reconstruction of the ACL have been patented and described. Most modern techniques utilize arthroscopic procedures to minimize the size of any incisions made. U.S. Patent No. 5,374,269, granted to Thomas D. Rosenberg on December 20, 1994 (hereinafter referred to as Rosenberg '269) is illustrative of the prior art. Rosenberg '269 describes variations on a number of common techniques of ACL reconstruction.

[0004] Rosenberg '269 specifically claims a method of forming a passageway in a femur at the knee joint. Its specification does not limit itself, however, to only describing this specific sub-procedure. Rosenberg '269 describes two ACL reconstruction methods that use the patellar tendon as the graft and one method that uses the semitendinosus tendon. Both the patellar tendon and the semitendinosus tendon can be harvested from the individual having the knee surgery and are, therefore, autografts. These tendons are commonly used as the replacement graft for the torn or ruptured ACL. In each of the methods described in Rosenberg '269, tunnels are drilled in the tibia and the femur. These tunnels end in the intra-articular space of the joint at the attachment sites of the torn or ruptured ACL. The tunnel in the tibia goes from the tibial cortex at a site between 20 and 25 mm below the knee joint to the intra-articular space of the knee joint. The tunnel in the femur is a closed-end

tunnel, although it may be formed with a channel that extends to the lateral surface of the femur, depending on the graft attachment method used. Rosenberg '269 modifies the prior art method of drilling the femoral tunnel, but is otherwise indicative of an accepted practice for forming the femoral and tibial tunnels.

[0005] In Rosenberg '269, the graft, whether a patellar tendon or a semitendinosus tendon, is implanted with one end secured in the closed-end femoral tunnel and the other end secured in the tibial tunnel or at a point adjacent to the tibial tunnel on the tibial cortex.

[0006] In the first method described by Rosenberg '269, using the patellar tendon, the bone plug on the leading end of the graft can be locked in place in the femoral tunnel with an interference screw. Rosenberg '269 also teaches a method by which the leading end bone plug is attached with sutures that are anchored to the lateral femoral cortex by means of a button. The sutures pass through a channel that extends from the closed end of the femoral tunnel to the lateral surface of the femur. The sutures attach to the leading bone plug. In both methods using the patellar tendon, the trailing bone plug is secured by staples to the tibial cortex below the tibial tunnel entrance.

[0007] Rosenberg '269 also describes a method for anchoring the semitendinosus tendon. Elongated sutures are attached to the ends of the semitendinosus tendon graft. The leading end of the graft is secured in a manner similar to the second method for securing the patellar tendon in the femoral tunnel described above. That is by means of sutures attached to a button on the lateral femur cortex, which are passed through a channel to the end of the femoral tunnel where they attach to the semitendinosus graft. The trailing edge of the graft is secured in the tibial tunnel by means of sutures that are affixed to a screw or post positioned on the tibia adjacent to the entrance of the tibial tunnel.

[0008] While the methods of preparing tunnels in the bones of the knee joint taught by Rosenberg '269 are applicable to methods using the present invention, the present device differs materially from any device taught in Rosenberg '269. The fixation screw of the present invention is an anchor. Rosenberg '269 teaches an interference screw. Furthermore, use of the fixation screw of the present invention requires vastly differing attachment methods for grafts than the methods taught by Rosenberg '269. First, the inventor prefers not to use the patellar tendon as a graft for ACL reconstruction. Second, when the fixation screw of the present invention is used with the semitendinosus tendon, there is no need to form a channel from the closed-end tunnel in the femur to the surface of the femoral cortex, nor is there a need to make a lateral incision at the lateral femoral cortex as is necessary with the method described by Rosenberg '269. Thus, methods employing the present invention reduce the number of incisions made and trauma to the femur or other bone in which the fixation screw is inserted. They also do not require the use

of sutures for anchoring the leading end of the semitendinosus tendon in the femoral tunnel.

[0009] While the present invention differs from the devices and methods taught by Rosenberg '269 in both form and use, two endosteal ligament retaining devices have been described that are more similar to the present invention in the methods by which they anchor a graft in the femur. They are U.S. Patent No. 5,129,902, entitled "Endosteal Ligament Retainer," granted to E. Marlowe Goble and Karl Somers on July 14, 1992 (hereinafter referred to as Goble '902) and U.S. Patent No. 5,152,790, entitled "Ligament Reconstruction Graft Anchor Apparatus," granted to Thomas D. Rosenberg, Gerard S. Carlozzi and William J. Reimels on October 6, 1992 (hereinafter referred to as Rosenberg '790). Like the present invention, these inventions teach an anchor inserted into a closed-end femoral tunnel that receives a graft. Also like the present invention, both of these devices are used in methods where the closed-end femoral tunnel is formed in the femur in a fashion similar to Rosenberg '269. However, like the method for which the present invention is designed and unlike Rosenberg '269, these methods and devices do not need a channel formed in the femur that passes from the closed-end tunnel to the lateral femoral cortex.

[0010] Goble '902 teaches an anchor consisting of a basket or disk for receiving a graft which is rotatably attached to a screw. The graft receiving disk or basket is able to spin on the screw head, preventing the graft from twisting or rotating as the screw is driven into the closed end of the femoral tunnel. The graft can either be looped through an opening in the basket or sutured to the basket.

[0011] Rosenberg '790 also teaches an anchor assembly consisting of a basket, called a ring in this case, for receiving the graft which is rotatably attached to a threaded body member. Like Goble '902, the graft receiving basket is able to spin on the threaded body member. Rosenberg '790, however, teaches suturing the graft to the ring.

[0012] There are a number of material differences between the prior art and the present invention. Both Goble '902 and Rosenberg '790 are multi-component anchors having moving parts. This can lead to complications. Furthermore, because the diameter of the basket of Goble '902 is much larger than the threads of the fixation screw, it could become wedged against the edge or side of the femoral tunnel during installation, making it difficult to fully insert or retrieve the anchor. It is to be noted that both Goble '902 and Rosenberg '790 teach using sutures as an intermediate means for attaching the graft to the anchor. The sutures are the weak link in the attachment and suture breakage is a consideration. Also, neither of the prior art devices are cannulated for use with a guide drill. Finally, in both Goble '902 and Rosenberg '790, because the means for attachment of the graft are located away from the central axis of the anchor or threaded member, the graft cannot be aligned with

the axis of the anchor member, either during or after installation.

[0013] Furthermore, in Goble '902, when sutures are not used to attach the graft to the basket, the graft can end up being pinched between the basket and the wall of the femoral tunnel. This is because the graft or grafts must loop through openings in the arcuate walls of the basket on its periphery.

[0014] To summarize, the present invention provides a fixation screw that has no moving parts, that can be installed in a closed-end femoral tunnel with the use of a guide drill, receive a graft without the necessity of sutures, receive a graft without causing pinching of the graft between the fixation screw and the wall of the femoral tunnel, and that allows the anchored graft to be aligned with the central axis of the fixation screw.

[0015] The present invention provides, in a first aspect a ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread; and
- c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

[0016] In a second aspect, the present invention provides a ligament reconstruction graft fixation screw and graft assembly for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread;
- c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion; and
- d. a graft secured to said head portion of said body member.

[0017] In a third aspect, the present invention provides a ligament reconstruction graft fixation screw and graft assembly for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said cen-

tral axis of said body member;

- b. a shank portion, having an external screw thread;
- c. a head portion rigidly and fixedly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion; and
- d. a graft directly secured to said head portion of said body member.

**[0018]** In a fourth aspect, the present invention provides a ligament reconstruction graft fixation screw and graft assembly for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread and a flute formed in said shank portion;
- c. a head portion rigidly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion; and
- d. a graft secured to said head portion of said body member.

**[0019]** In a fifth aspect, the present invention provides a ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread; and
- c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver, said head portion having an eyelet that is large enough to receive said graft, and the diameter of said eyelet is larger than the width of said cannula.

**[0020]** In a sixth aspect, the present invention provides a ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread, said external screw thread starting substantially at said distal end of said body member; and
- c. a head portion rigidly and fixedly coupled to said

shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

**[0021]** In a seventh aspect, the present invention provides a ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread, said external screw thread starting substantially at said distal end of said body member; and
- c. a head portion fixedly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

**[0022]** In an eighth aspect, the present invention provides a ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
- b. a shank portion, having an external screw thread, a minor diameter and a major diameter, said minor diameter being approximately 30 percent as wide as said major diameter; and
- c. a head portion fixedly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

#### 40. Summary of the Invention

**[0023]** It is an object of the present invention to provide a fixation screw for attaching a graft to bone that is of unitary construction.

**[0024]** It is another object of the present invention to provide a fixation screw that can be used with a guide drill.

**[0025]** It is a further object to provide a fixation screw that is self-tapping in bone.

**[0026]** It is a further object of the present invention to provide a fixation screw that can receive a graft ligament without requiring the use of sutures or other additional connective members.

**[0027]** Another object of the present invention is to provide a fixation screw that can directly receive a graft ligament without pinching the graft between the wall of the tunnel and the head portion of the fixation screw.

**[0028]** A further object of the present invention is to

provide a fixation screw that can receive a graft that is aligned with the central axis of the fixation screw.

[0029] Another object of the present invention is to provide a method of attaching the graft to the fixation screw that allows the graft to be doubled-over, forming a sling thereby increasing the tensile strength of the graft.

[0030] Another object of the present invention is to provide a fixation screw that is suitable for anchoring a graft in the femur for reconstructing the anterior cruciate ligament (ACL) of the knee. A further object of the present invention is to provide a fixation screw that is suitable for arthroscopic ACL reconstruction procedures.

[0031] Another object of the present invention is to provide a fixation screw that is suitable to ACL reconstruction procedures that are minimally invasive so as to lessen trauma and facilitate patient rehabilitation.

[0032] Another object of the present invention is to provide a fixation screw that is particularly suited for use with either the semitendinosus tendon or the gracilis tendons, or both as the graft to be anchored in ACL reconstruction.

#### Brief Description of the Drawings

[0033] Preferred embodiments of the present invention will now be described with reference to the accompanying drawings in which:

[0034] FIG. 1 is a schematic anterior view of the left knee in flexion. Portions of the femur, tibia and fibula are shown with a tibial tunnel and a closed end, femoral, endosteal tunnel having been drilled in the tibia and femur respectively. The knee is shown with a guide drill in place passing through the tibial tunnel and the femoral endosteal tunnel for receiving the fixation screw of the present invention. The knee is shown with a guide drill in place, passing through the tibial tunnel and the femoral endosteal tunnel for receiving the fixation screw of the present invention.

[0035] FIG. 2 is a schematic anterior view of the left knee in flexion. A driver is shown inserted over the guide drill. The fixation screw of the present invention is attached to the driver and is partially inserted into the closed end femoral tunnel. Two grafts are shown looped through the eyelet of the present invention. Sutures, attached to the ends of the grafts, pass through grooves on the driver handle and are tied at a button on the end of the driver.

[0036] FIG. 3 is a schematic cross section of a knee in flexion. Portions of the femur and tibia are shown. The fixation screw is shown placed in the femur. Two grafts are received by the eyelet of the fixation screw. The two grafts are shown attached to the tibia cortical surface with bone staples near the entrance of the tibial tunnel.

[0037] FIG. 4 is a front view of the preferred form of the fixation screw of the present invention inserted over a guide drill. The fixation screw is shown with a cutting

flute at its distal end. It is also shown with openings in the proximal end of the body member and head portion that receive corresponding extensions on a matching driver.

5 [0038] FIG. 5 is a front view of the fixation screw of the present invention inserted over a guide drill. The fixation screw is shown with openings in the proximal end of the body member and head portion that receive corresponding extensions on a matching driver.

10 [0039] FIG. 6 is a front view of a portion of the fixation screw of the present invention and a portion of a driver for inserting the fixation screw. The head portion and part of the shank portion of the fixation screw are shown. The fixation screw is shown with openings in the proximal end of the body member and head portion that receive corresponding extensions on the driver.

[0040] FIG. 7 is a top view of fixation screw of the present invention, showing the head portion of body member, taken generally along line 7-7 of FIG. 6.

20 [0041] FIG. 8 is a front view of a portion of another form of the fixation screw of the present invention and a portion of a driver for inserting the fixation screw. The head portion and part of the shank portion of the fixation screw are shown. The fixation screw is shown with a portion of the cannula in the proximal end of the body member shaped to closely receive a hexagonal driver.

[0042] FIG. 9 is a top view of the fixation screw of the present invention, showing the head portion of the body member, taken along line 9-9 of FIG. 8.

30 [0043] FIG. 10A is a side view of a portion of another form of the fixation screw of the present invention and a portion of a driver for inserting the fixation screw. The head portion and part of the shank portion of the fixation screw are shown. A forked driver with two prongs is shown inserted over the proximal end of the body member.

[0044] FIG. 10B is a front view of a portion of the fixation screw of the present invention and a portion of a driver for inserting the fixation screw. The head portion and part of the shank portion of the fixation screw are shown. A forked driver with two prongs is shown inserted over the proximal end of the body member.

40 [0045] FIG. 11 is a top view of the fixation screw of the present invention, taken along line 11 - 11 of FIG. 10A. A portion of the forked driver is shown in cross-section.

45 [0046] FIG. 12 is a perspective view of a portion of the fixation screw of the present invention and a portion of a driver for inserting the fixation screw. The head portion and part of the shank portion of the fixation screw are shown. A forked driver having two prongs is shown.

#### Description of the Preferred Embodiment of the Invention

55 [0047] The present invention teaches a graft fixation screw for securing a graft 1 to a bone 2. As shown in FIG. 4, the body member 3 of the present invention has

a distal end 4, a proximal end 5, a central axis 6 and a cannula 7 through said central axis 6 of said body member 3. The fixation screw is formed with a cannula 7 to allow the fixation screw to be used with a guide drill 8 for ensuring anatomic placement of the fixation screw.

[0048] The body member 3 of the fixation screw of the present invention also has a shank portion 9 which is formed with an external screw thread 10, and a head portion 11 rigidly coupled to the shank portion 9. The head portion 11 is formed with means for mechanically coupling with a driver and also with means for securing the graft 1 to the head portion 11.

[0049] As is also shown in FIG. 4, in the preferred embodiment of the present invention, the cannula 7 in the shank portion 9 of the body member 3 is dimensioned to closely receive a guide drill 8.

[0050] In the preferred embodiment of the present invention, the thread 10 on the shank portion 9 is self-tapping in cancellous bone. Also in the preferred embodiment, the thread 10 starts substantially at the distal end 4 of the body member 3. As is shown in FIG. 4, the fixation screw of the present invention is preferably formed with one or more flutes 12 in the shank portion 9 and thread 10 to improve the ability of the thread 10 to tap into cancellous bone. As is also shown in FIG. 4, the thread 10 extends from the distal end 4 of the body member 3 to better anchor the fixation screw in bone 2.

[0051] As is shown in FIG. 3, in the preferred embodiment of the present invention the means for securing the graft 1 to the head portion 11 is an eyelet 13 formed in the head portion 11 that is large enough to receive the graft 1. The graft 1 is looped or threaded through the eyelet 13. As is shown in FIG. 3, the graft 1 preferably consists of two separate members, specifically the gracilis tendon and the semitendinosus tendon.

[0052] As is shown in FIG. 4, in the preferred embodiment of the present invention, the central axis 6 bisects the eyelet 13, such that when the graft 1 consists of only one member, it can align with the central axis 6. When two separate members are used for the graft 1, the position of the eyelet 13 in relation to the central axis 6 helps the separate members of the graft 1 to be positioned as closely as possible to the central axis 6 and away from the side wall 14 of the endosteal tunnel 15 in which the fixation screw is being inserted. FIG. 3 shows a closed-end, endosteal tunnel 15 formed in the femur 2 which for short-hand purposes is called a femoral endosteal tunnel 15.

[0053] As is best shown in FIGS. 2 and 4, in the preferred embodiment of the present invention, the diameter of the eyelet 13 is larger than the width of the cannula 7 such that the cannula 7 can receive a guide drill 8 for positioning the fixation screw at the same time that the graft 1 is received by the eyelet 13.

[0054] As is best shown in FIG. 3, the eyelet is shaped so that the graft is moved away from the side wall 14 of the endosteal tunnel 15 when it is pulled taut so as to prevent damage to the graft 1 due to abrasion with the

side wall 14 of the endosteal tunnel 15. This is accomplished by forming the eyelet 13 so that it approaches an ellipse or oval in shape.

[0055] In one embodiment of the present invention, the means for mechanically coupling with a driver consists of forming a portion of the cannula 7 in the head portion 11 to closely receive and mechanically couple with a corresponding driver 16. As is shown in FIGS. 8 and 9, a portion of the cannula 7 in the head portion 11 is formed to closely receive and mechanically couple with a hexagonally shaped driver 16.

[0056] In another form of the present invention, the entire cannula 7 in the head portion 11 can be formed to closely receive and mechanically couple with a driver, such that the driver as well as the guide drill 8 passes through the eyelet 13. In such an embodiment, the diameter of the eyelet 13 should be larger than the width of the cannula 7, such that the cannula 7 in the head portion 11 can receive a guide drill 8 for positioning the fixation screw and a driver for inserting the fixation screw at the same time that the graft 1 is received by the eyelet 13.

[0057] As is shown in FIGS. 10A, 10B, 11 and 12, in another form of the present invention the means for mechanically coupling with the driver can consist of the proximal end 5 of the body member 3 formed to be closely received between cooperating prongs 17 and 18 of a driver 19.

[0058] As is shown in FIGS. 4, 5, 6 and 7 in the preferred form of the invention the means for mechanically coupling with the driver consists of forming two bores 20 and 21 in the head portion 11 of the body member 3 that can receive corresponding extensions 22 and 23 on a special driver 24. In the preferred form, the pair of bores 20 and 21 in the head portion 11 are cylindrical and couple with a cannulated driver 24 with corresponding cylindrical extensions 22 and 23. The preferred means for mechanically coupling with the driver allows the head portion 11 to be formed so as to provide maximum room for the graft 1 to pass around the proximal end 5.

[0059] In the preferred embodiment of the fixation screw, the minor diameter 25 of the shank 9 will be approximately 30% of the major diameter 26 of the thread 10. The minor diameter 25 is minimized to lessen the displacement of cancellous bone when only a drill guide 8 is used to prepare the bone 30 for the insertion of the threaded shank 9 past the closed end 27 of the endosteal tunnel 15.

[0060] The driver 16, 19, or 24 is preferably marked so that when the fixation screw of the present invention is fully seated in the bone 2, a mark 28 on the driver 16, 19, or 24 will align with the entrance of the endosteal tunnel 15.

[0061] The present invention can be formed of metal (e.g. 316 stainless steel or titanium), a non-absorbable polyethylene, an absorbable polylactic acid substance, or an absorbable polyglycolic acid substance to name

a few bio-compatible substances.

[0062] With reference to FIGS. 1, 2 and 3, preferably, the intra-articular tendon sling fixation screw of the present invention is used in arthroscopic ACL reconstruction surgery in the following manner.

[0063] A tibial tunnel 29 is formed in the tibia 30 with its entrance at the tibial cortex 31 and its exit at the attachment site of the anterior cruciate ligament on the tibia 30. A tibial guide is used to determine the insertion point for the guide drill 8. The guide drill 8 is inserted into and through the tibia 30 at the proper angle. Using the guide drill 8 as a guide, a coring drill removes a section of the tibia 30 forming the tibial tunnel 29. The bone section removed by the coring drill is used to create bone plugs which are inserted into the tibial tunnel 29 and the femoral endosteal tunnel 15 at the end of the procedure.

[0064] Next the location of the closed-end endosteal tunnel 15 in the femur 2 is determined. The endosteal tunnel 15 is to be formed in the femur 2 with its entrance at the attachment point of the anterior cruciate ligament with the femur 2. This tunnel is also known as a femoral endosteal tunnel 15. A femoral tunnel guide is used to determine the correct angle and point of entry for the endosteal tunnel 15 into the femur 2. A guide drill 8 is then drilled into the femur 2 in the correct anatomic position - the insertion point of the ACL in the femur 2 - using the femoral tunnel guide as a pilot. The guide drill 8 serves to mark the anatomic position for subsequent boring. The guide drill 8 is preferably drilled into the femur 2 deep enough to engage the anterior lateral femoral cortex 32. This prevents the guide drill 8 from backing out. The guide drill 8 also passes through the tibial tunnel 29.

[0065] The femoral endosteal tunnel 15 is then formed using a cannulated acorn drill that fits over the guide drill 8. The femoral endosteal tunnel 15 should be drilled 1 mm larger than the major diameter 26 of the thread 10, so as to facilitate insertion of the fixation screw into the closed-end, endosteal tunnel 15. The appropriately sized acorn drill is thus 1 mm larger than major diameter 26 of the thread 10 of the fixation screw. The femoral endosteal tunnel 15 should be drilled deep enough to completely receive the head portion 11 of the fixation screw and a bone plug when the threaded shank 9 of the fixation screw has been completely inserted into the femur 2.

[0066] The acorn drill is then removed. The intra-articular tendon sling fixation screw of the present invention is then prepared. The graft 1 is looped through the eyelet 13 of the fixation screw. In the preferred embodiment, the graft 1 consists of both the semitendinosus and gracilis tendons for added strength. The fixation screw is then inserted over the drill guide 8, with the semitendinosus tendon looped through the eyelet 13 on one side of the drill guide 8 and the gracilis tendon looped through the eyelet 13 on the other side of the drill guide 8.

[0067] Next the preferred driver 24 is inserted over the drill guide 8 and releasably attached to the fixation screw. In the preferred embodiment of the fixation screw, a pair of cylindrical bores 20 and 21, formed in the head portion 11, couple with corresponding cylindrical extensions 22 and 23 on the cannulated driver 24. Prior to threading the graft 1 into the eyelet 13 of the fixation screw, sutures 33 are attached to the ends of the grafts 1. These sutured ends of the grafts 1 are then pulled taut, with the attached sutures 33 fitting into grooves 34 on the sides of the handle 35 of the driver 24. The sutures 33 are tied off on a button 36 on the driver 24. Pulling the grafts 1 taut causes them to move away from the side wall 14 of the femoral endosteal tunnel 15 so they cannot be abraded. With the sutures 33 tied off on the button 36 and nestled in the grooves 34 of the driver handle 35, the grafts 1 will turn with the driver 24 and not twist.

[0068] The fixation screw is then inserted into the femoral endosteal tunnel 15. When the distal end 4 of the fixation screw touches the closed end 27 of the femoral endosteal tunnel 15, the surgeon begins to drive the fixation screw into the femur 2 by rotating the driver 24 and applying pressure. The surgeon can tell when the fixation screw has been driven into the bone 2 to a sufficient depth by referring to markings 28 on the driver 24 which will align with the entrance of the femoral endosteal tunnel 15 when the fixation screw is fully seated in the bone 2.

[0069] When the fixation screw is in place, the sutures 33 attached to the ends of the grafts 1 are removed from the driver 24. Then the driver 24 and the drill guide 8 are removed. The grafts 1 are pulled taut and fixed to the tibial cortex 31 near the entrance of the tibial tunnel 29 by means of staples 37 in a pants-over-vest attachment system. Then the sutures 33 are cut at the ends of the grafts 1.

[0070] The bone plugs fashioned from the tibial bone section removed by the coring drill are then placed in the femoral endosteal tunnel 15 and the tibial tunnel 29 to allow bone to tendon healing.

[0071] If a self-tapping form of the fixation screw is not used, then a step must be added. After the femoral endosteal tunnel 15 is formed with the acorn drill, a tap must be used to pre-cut a path in the cancellous bone at the closed end 27 of the femoral endosteal tunnel 15 for the threaded shank portion 9 of the fixation screw.

[0072] The invention is not limited to the specific form shown, but includes all forms within the definitions of the following claims.

## Claims

1. A ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:



- a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
  - b. a shank portion, having an external screw thread; and
  - c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.
2. A fixation screw as claimed in claim 1 wherein said means for securing said graft to said head portion intersect with said cannula.
  3. A ligament reconstruction graft fixation screw and graft assembly for securing a graft to a bone having a tunnel formed therein comprising:
    - a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;
    - b. a shank portion, having an external screw thread;
    - c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion; and
    - d. a graft secured to said head portion of said body member.
  4. A fixation screw according to claim 1 or claim 2 or an assembly according to claim 3 wherein said thread extends from said distal end of said body member.
  5. A fixation screw or an assembly according to any one of the preceding claims wherein said means for securing said graft to said head portion is an eyelet formed in said head portion.
  6. A fixation screw or an assembly according to claim 5 wherein said eyelet formed in said head portion is large enough to receive said graft.
  7. A fixation screw or an assembly according to claim 5 or claim 6 wherein said central axis bisects said eyelet, such that said graft can align with said central axis.
  8. A fixation screw or an assembly according to any one of claims 5 to 7 wherein the diameter of said eyelet is larger than the width of said cannula such that said cannula can receive a guide drill for positioning said fixation screw at the same time that the said graft is received by said eyelet.
  9. A fixation screw or an assembly according to any one of the preceding claims wherein said means for mechanically coupling with said driver consists of a portion of said cannula in said head portion formed to closely receive and mechanically couple with said driver.
  10. A fixation screw or an assembly according to any one of claims 1 to 8 wherein:
    - a. said means for mechanically coupling with said driver consists of said cannula in said head portion formed to closely receive and mechanically couple with said driver; and
    - b. said means for securing said graft to said head portion is an eyelet formed in said head portion that is large enough to receive said graft, and the diameter of said eyelet is larger than the width of said cannula such that said cannula in said head portion can receive a guide drill for positioning said fixation screw and a driver for inserting said fixation screw at the same time that said graft is received by said eyelet.
  11. A fixation screw or an assembly according to any one of claims 1 to 8 wherein said means for mechanically coupling with said driver consists of said proximal end of said body member formed to be closely received between co-operating prongs on said driver.
  12. A fixation screw or an assembly according to any one of claims 1 to 8 wherein said means for mechanically coupling with said driver consists of at least two bores formed in said head portion of said body member that can receive corresponding extensions on said driver.
  13. A fixation screw or an assembly according to any one of claims 5 to 12 wherein said central axis bisects said eyelet, such that said graft can be bisected by said central axis.
  14. A fixation screw or an assembly according to any one of the preceding claims wherein said cannula in said shank portion of said body member is dimensioned to closely receive a guide drill.
  15. A fixation screw or an assembly according to any one of the preceding claims wherein said thread is self-tapping in cancellous bone.
  16. A fixation screw or an assembly according to any

one of the preceding claims wherein a flute is formed in said shank portion of said body member.

17. A fixation screw and graft assembly as claimed in claim 3 wherein:

a. said means for mechanically coupling with said driver consists of said cannula in said head portion formed to closely receive and mechanically couple with said driver; and  
b. said means for securing said graft to said head portion is an eyelet formed in said head portion that is large enough to receive said graft, said eyelet intersecting with said cannula, and the diameter of said eyelet is larger than the width of said cannula such that said cannula in said head portion can receive a guide drill for positioning said fixation screw and a driver for inserting said fixation screw at the same time that said graft is received by said eyelet.

18. A fixation screw according to claim 1 wherein:

a. said means for mechanically coupling with said driver consists of said cannula in said head portion formed to closely receive and mechanically couple with said driver; and  
b. said means for securing said graft to said head portion is an eyelet formed in said head portion that is large enough to receive said graft, said eyelet intersecting with said cannula, and the diameter of said eyelet is larger than the width of said cannula such that said cannula in said head portion can receive a guide drill for positioning said fixation screw and a driver for inserting said fixation screw at the same time that said graft is received by said eyelet.

19. A ligament reconstruction graft fixation screw and graft assembly for securing a graft to a bone having a tunnel formed therein comprising:

a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;  
b. a shank portion, having an external screw thread;  
c. a head portion rigidly and fixedly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion; and  
d. a graft directly secured to said head portion of said body member.

20. A ligament reconstruction graft fixation screw and graft assembly for securing a graft to a bone having a tunnel formed therein comprising:

a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;  
b. a shank portion, having an external screw thread and a flute formed in said shank portion;  
c. a head portion rigidly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion; and  
d. a graft secured to said head portion of said body member.

21. A ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;  
b. a shank portion, having an external screw thread; and  
c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver, said head portion having an eyelet that is large enough to receive said graft, and the diameter of said eyelet is larger than the width of said cannula.

22. A ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;  
b. a shank portion, having an external screw thread, said external screw thread starting substantially at said distal end of said body member; and  
c. a head portion rigidly and fixedly coupled to said shank portion so that said head portion moves in unison with said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

23. A ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;  
b. a shank portion, having an external screw

thread, said external screw thread starting substantially at said distal end of said body member; and

c. a head portion fixedly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

24. A ligament reconstruction graft fixation screw for securing a graft to a bone having a tunnel formed therein comprising:

a. a body member, having a distal end, a proximal end, a central axis and a cannula through said central axis of said body member;

b. a shank portion, having an external screw thread, a minor diameter and a major diameter, said minor diameter being approximately 30 percent as wide as said major diameter; and

c. a head portion fixedly coupled to said shank portion, said head portion being formed with means for mechanically coupling with a driver and with means for securing said graft to said head portion.

30


35

40


45

50


55

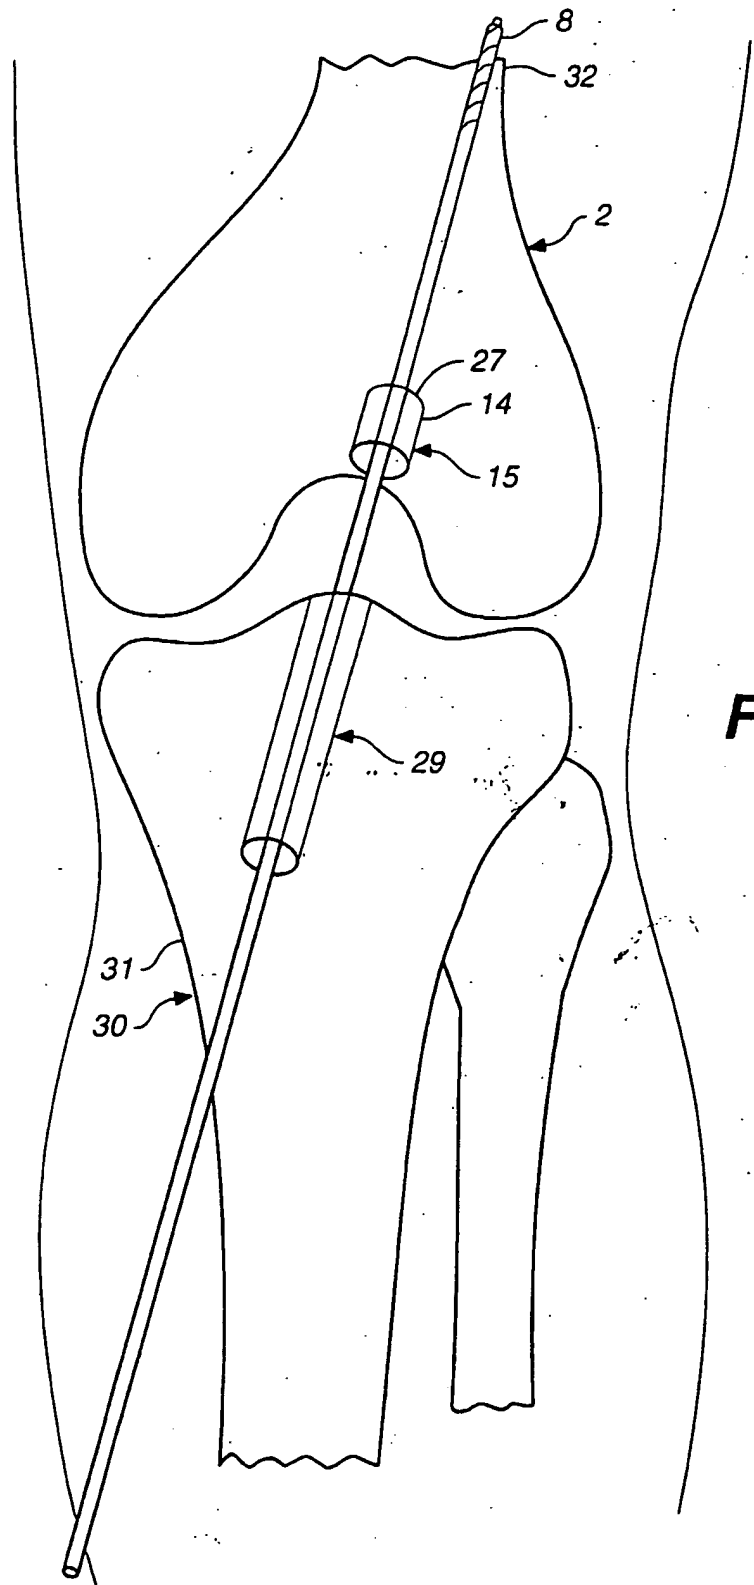


**FIG. 1**

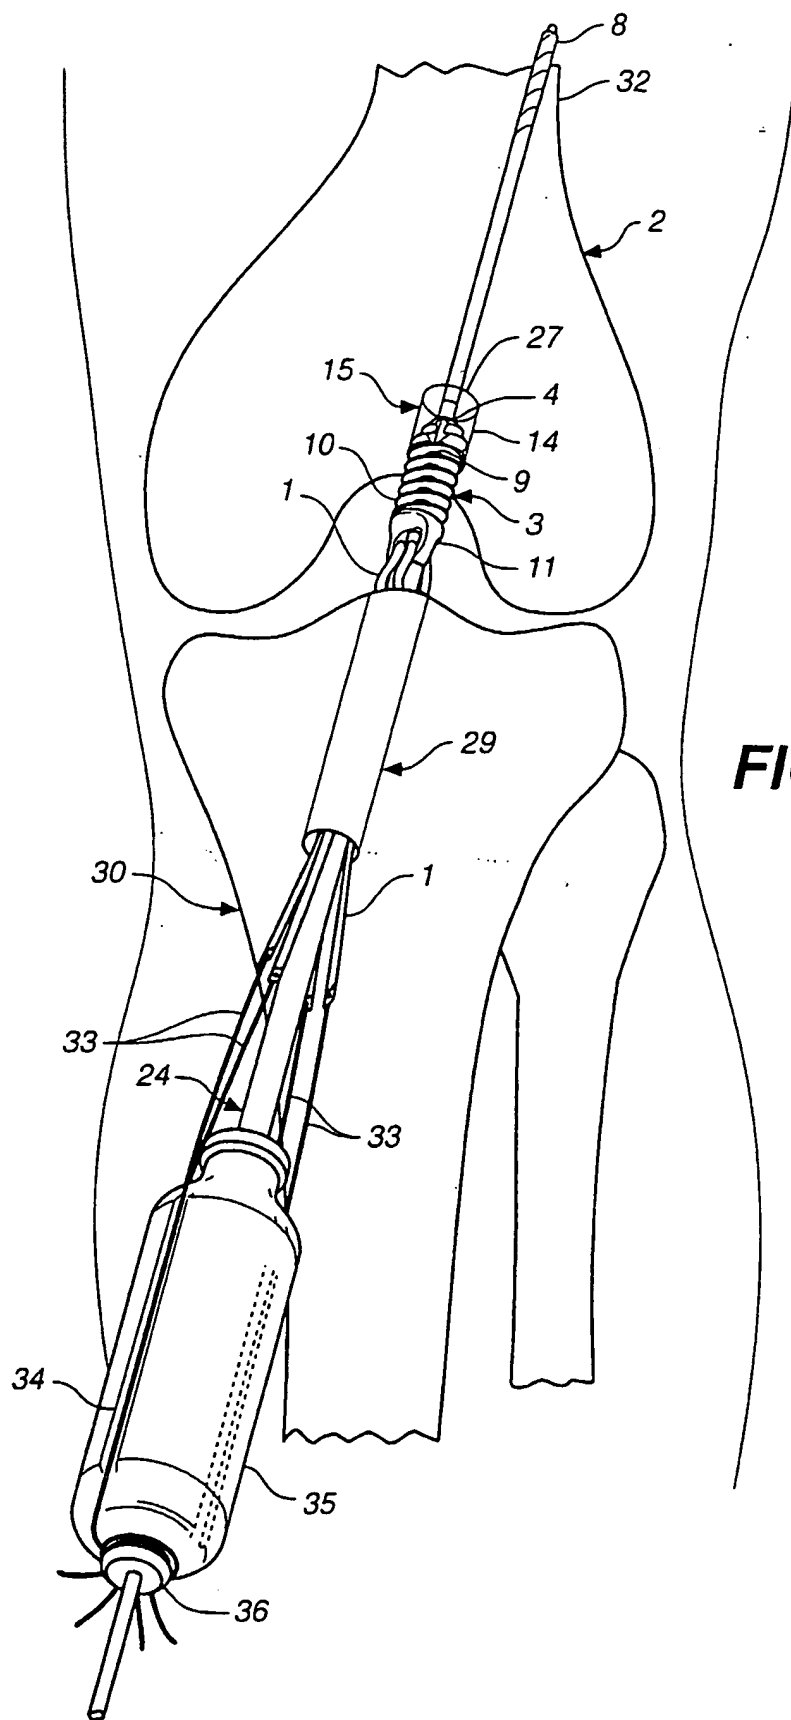


**FIG. 2**

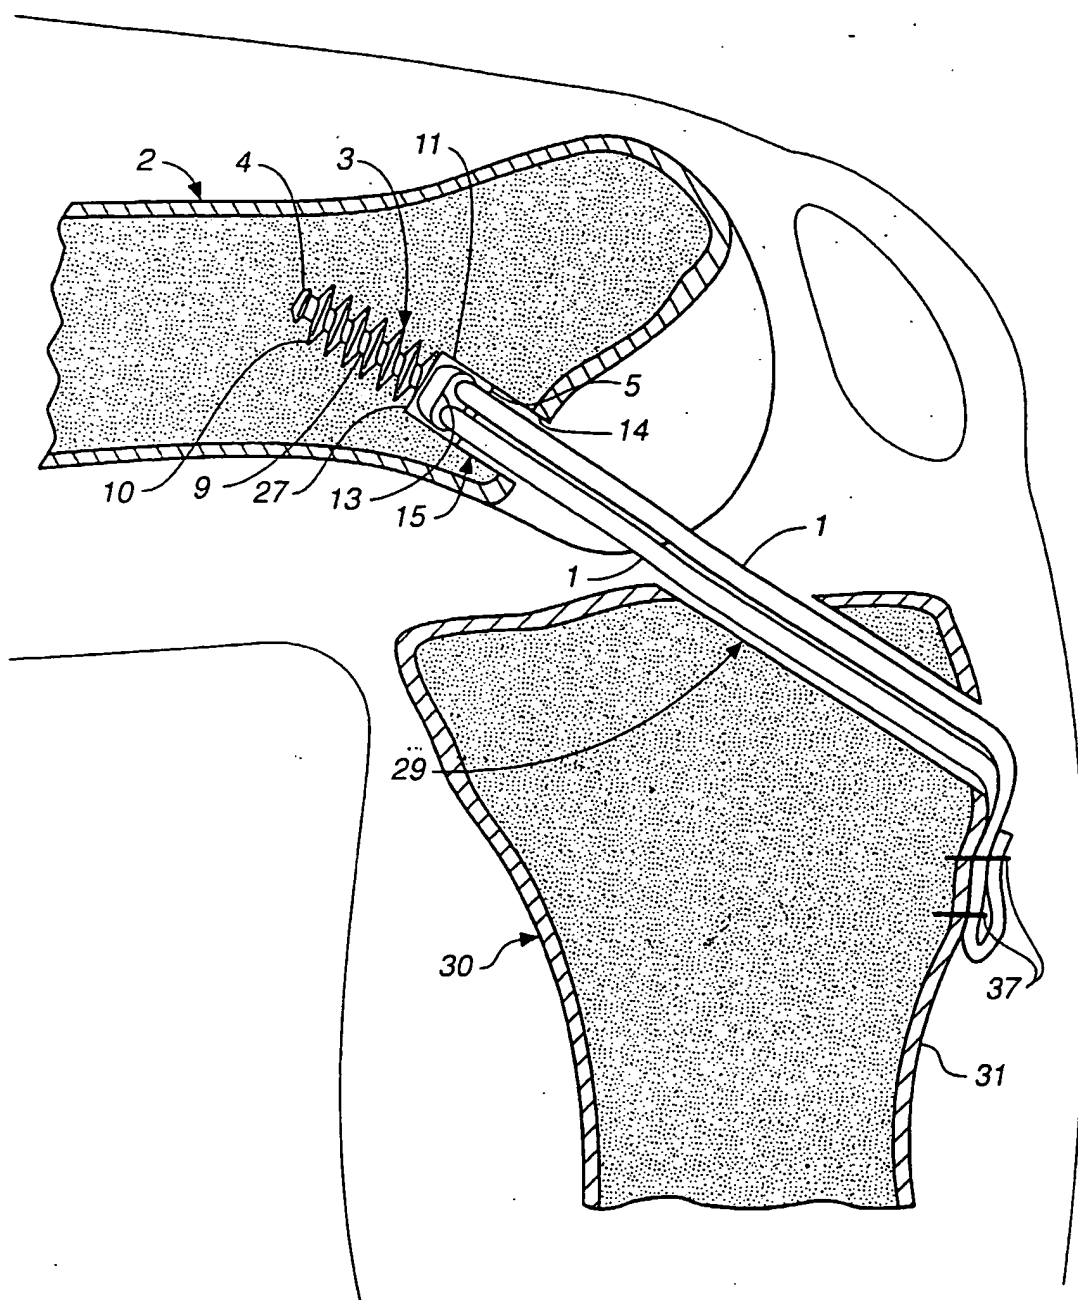



**FIG. 3**


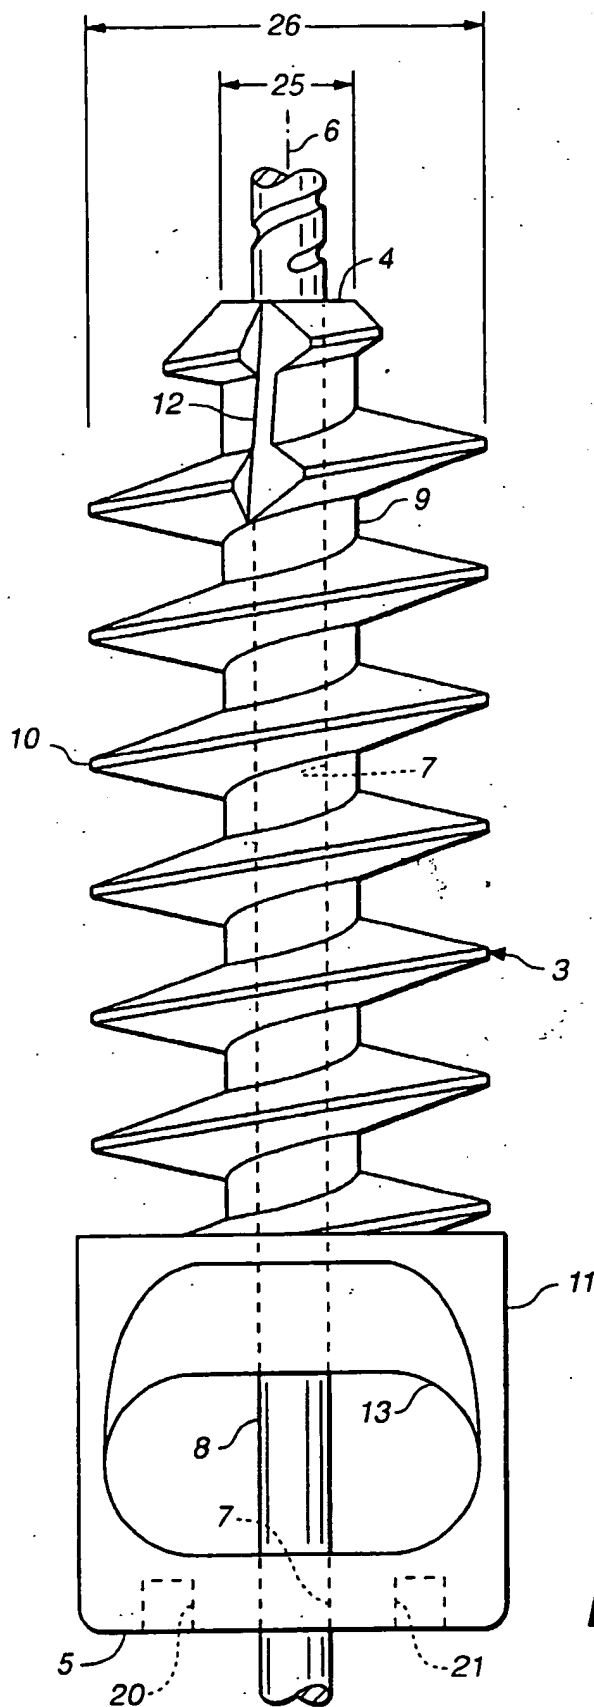


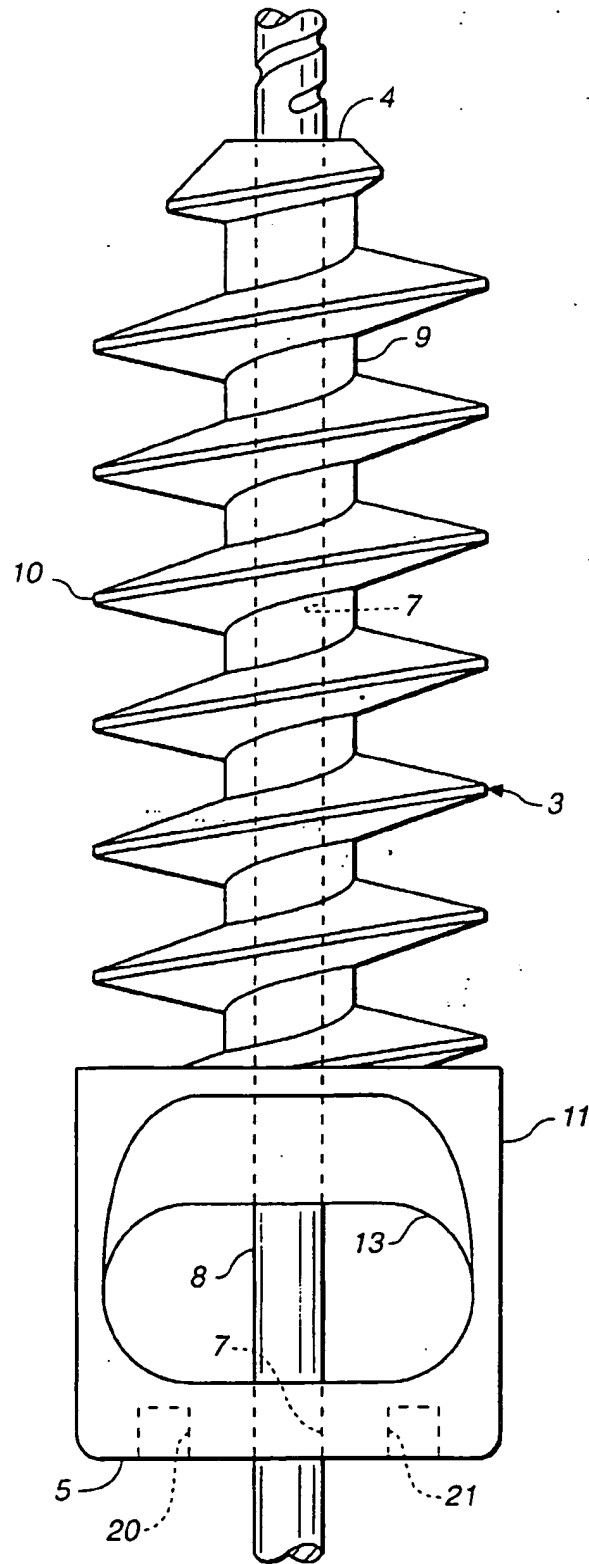


**FIG. 5**




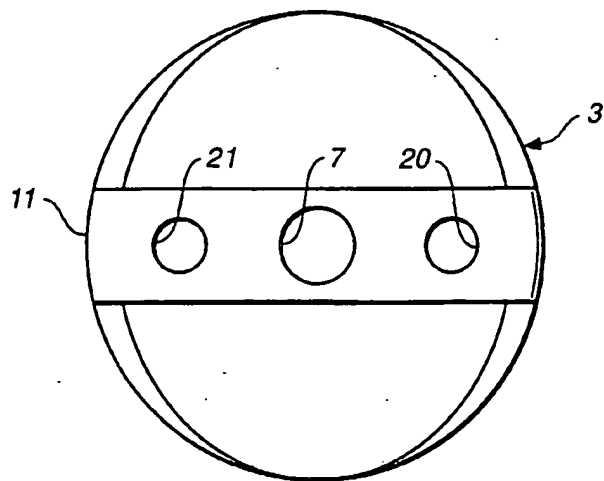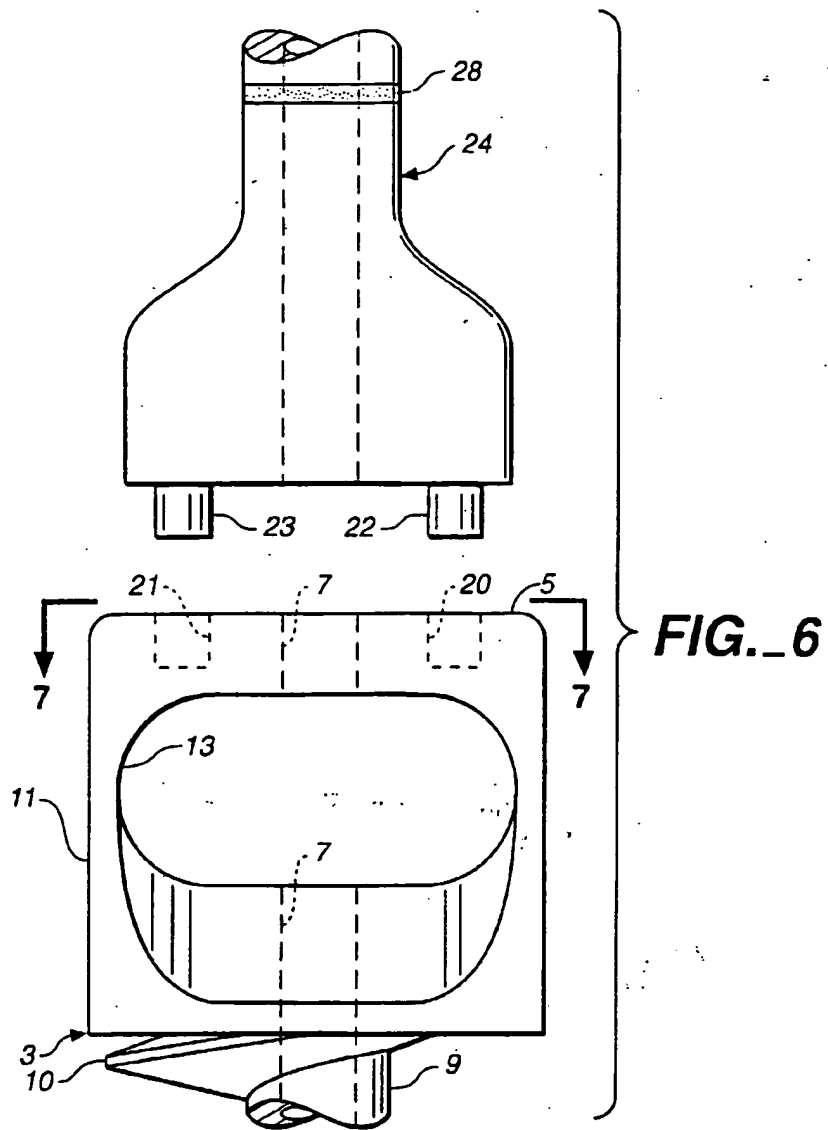

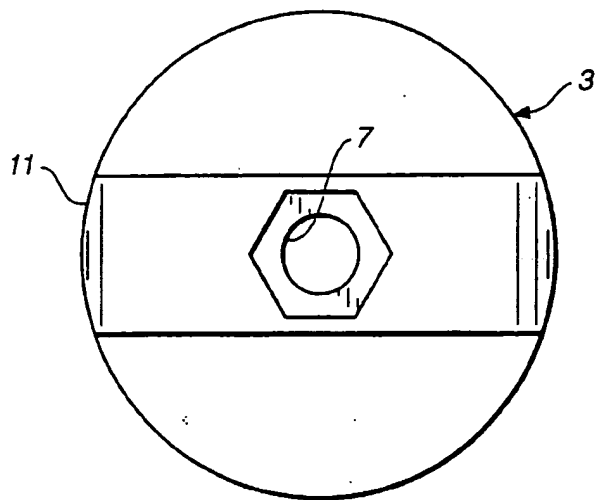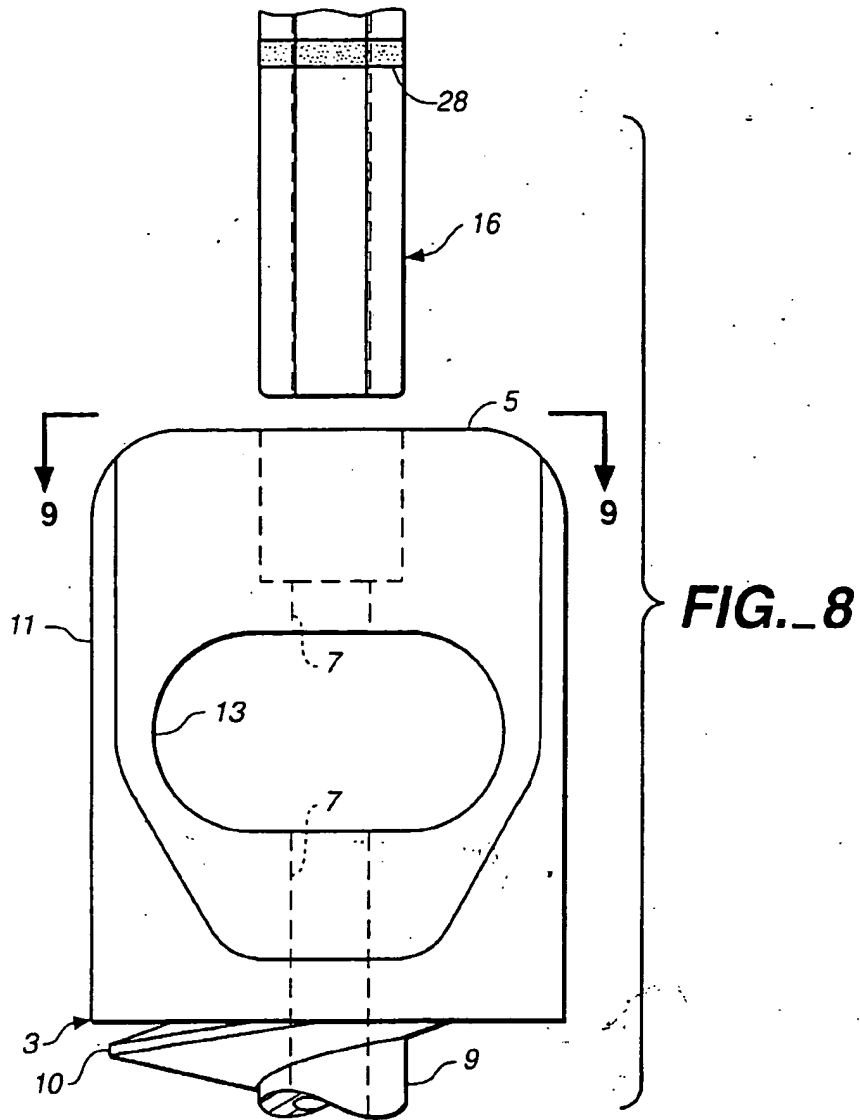


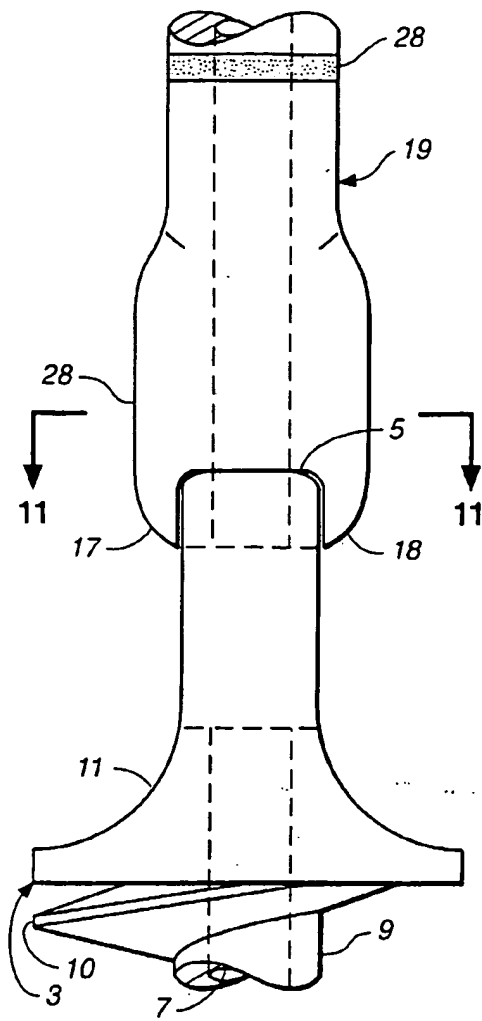


**FIG. 10A**

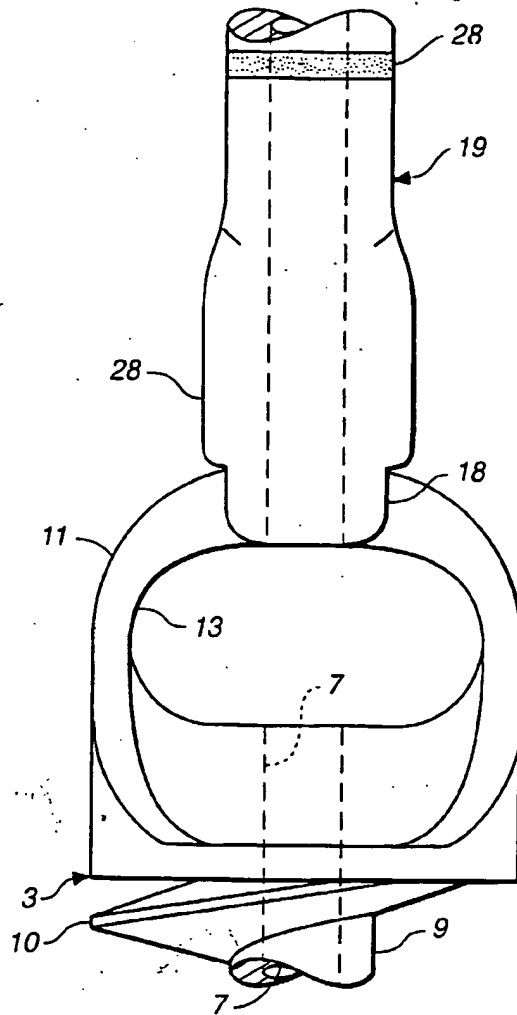

**FIG. 10B**

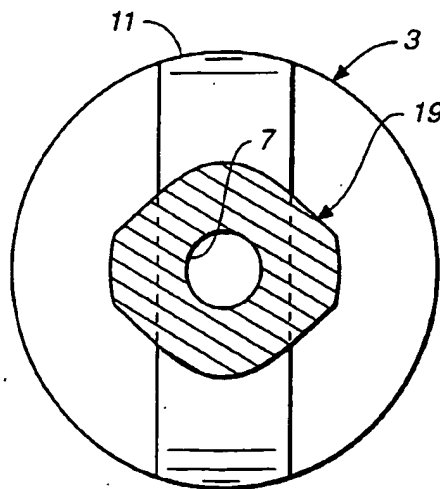

**FIG. 11**

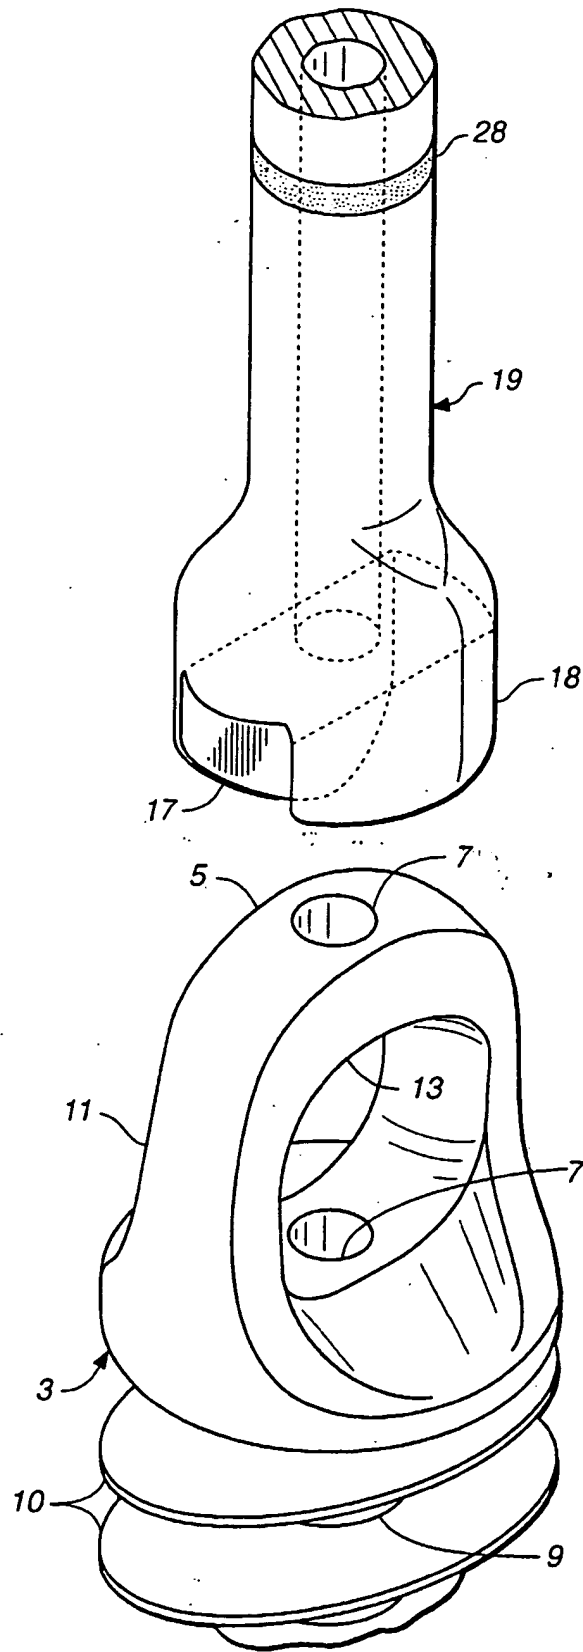

**FIG. 12**

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 913 131 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
14.06.2000 Bulletin 2000/24

(51) Int Cl.7: A61F 2/08

(43) Date of publication A2:  
06.05.1999 Bulletin 1999/18

(21) Application number: 98308334.6

(22) Date of filing: 14.10.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Frazier, John K.  
Lafayette, California 94549 (US)

(74) Representative:  
Pluckrose, Anthony William et al  
BOULT WADE TENNANT,  
Verulam Gardens  
70 Gray's Inn Road  
London WC1X 8BT (GB)

(30) Priority: 14.10.1997 US 949368

(71) Applicant: Frazier, John K.  
Lafayette, California 94549 (US)

### (54) Intra-articular tendon sling fixation screw

(57) The present invention, with reference to Figure 3, teaches a fixation screw for securing a graft (1) to a bone (2). The fixation screw is formed with a body member (3) having a distal end (4), a proximal end (5), a central axis (6) and a cannula (7) through the central axis (6) of the body member (3). The body member (3) also

has a shank portion (9) which is formed with an external screw thread (10), and a head portion (11) rigidly coupled to the shank portion (9). The head portion (11) is formed to mechanically couple with a driver and also to directly receive the graft (1) which the fixation screw anchors.

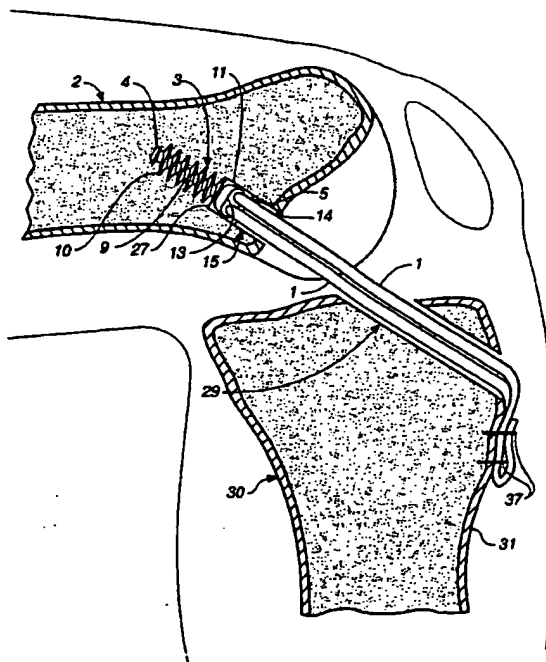


FIG. 3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 8334

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,X	US 5 152 790 A (ROSENBERG THOMAS D ET AL) 6 October 1992 (1992-10-06)  * column 3, line 20 - column 4, line 26 *	1,3-6,9, 11,12, 19-24	A61F2/08
D,A	US 5 129 902 A (GOBLE E MARLOWE ET AL) 14 July 1992 (1992-07-14)  * column 4, line 32 - column 5, line 31 *	1,3-6,9, 11,12, 19-24	
A	EP 0 649 638 A (SQUIBB BRISTOL MYERS CO) 26 April 1995 (1995-04-26) * column 4, line 45 - column 5, line 18 *	1,4,9, 15,22-24	
A	US 5 443 482 A (STONE KEVIN R ET AL) 22 August 1995 (1995-08-22)  * column 3, line 61 - column 5, line 11 *	1,3, 5-10,13, 15-24	
A	US 5 374 269 A (ROSENBERG THOMAS D) 20 December 1994 (1994-12-20) * the whole document *	1-24	
A	FR 2 622 790 A (MATCO) 12 May 1989 (1989-05-12) * the whole document *	1-24	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  A61F A61B
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>19 April 2000</b>	Examiner <b>Daintith, N</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1603 03.82 (P040011)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8334

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-04-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5152790 A	06-10-1992	NONE	
US 5129902 A	14-07-1992	NONE	
EP 0649638 A	26-04-1995	AU 684145 B	04-12-1997
		AU 1665097 A	12-06-1997
		AU 677355 B	17-04-1997
		AU 7164594 A	06-04-1995
		CA 2131141 A	25-03-1995
		JP 7163599 A	27-06-1995
		US 5658289 A	19-08-1997
US 5443482 A	22-08-1995	US 5370662 A	06-12-1994
		WO 9617551 A	13-06-1996
		US 5824011 A	20-10-1998
		AU 1334595 A	26-06-1996
US 5374269 A	20-12-1994	US 5139520 A	18-08-1992
		AU 7010691 A	01-08-1991
		CA 2035201 A	01-08-1991
		EP 0440991 A	14-08-1991
		FI 910443 A	01-08-1991
FR 2622790 A	12-05-1989	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82